



DD Fenders

DD Fenders provide an excellent barrier against damage from all sizes and shapes of vessels.

They are ideal for smaller quays and wharves serving fishing boats, tugs, barges and other work craft. DD Fenders are also commonly used on pontoons and on inland waterways for lock protection.

The flat rear face DD fender makes them easy to install with a flat bar down the bore.

DD fenders can be supplied in long lengths with maximum length restricted only by transport and handling limitations.


DD Fenders types :


Type GDD with bore on the back for easy fixing to the flat material (Steel, Concrete, Wood)

Type GDC with bore Vertical for fixing between two flat steel bars.

Features

1. Ideal for smaller quays and wharves
2. Easy to install with a flat bar down the bore
3. Can be supplied in long lengths and be cut to length, angle cut at the ends

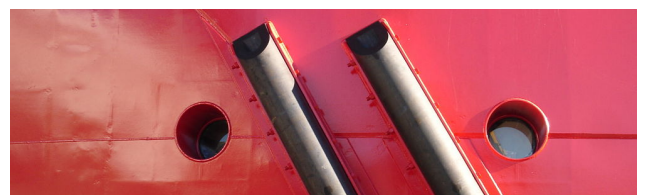

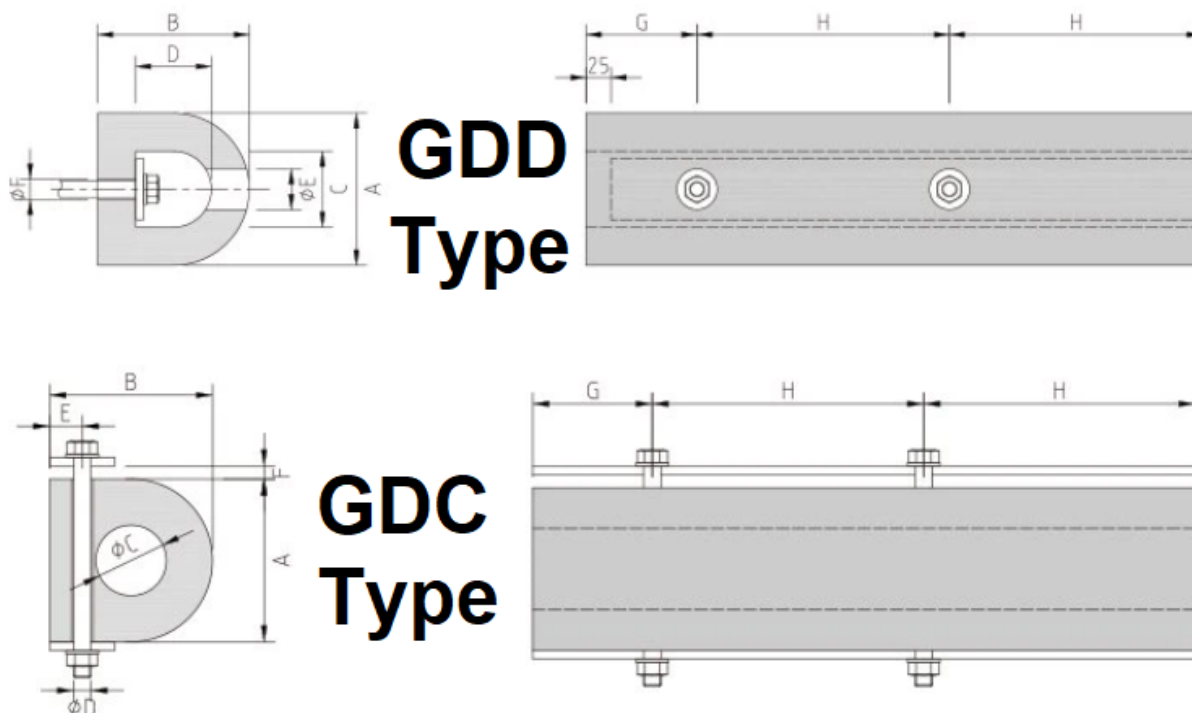

GDD RUBBER FENDERS											
Fender size	A	B	C	D	ØE	ØF	G	H	Flat bar	Bolt size	Weight
GDD80	80	70	45	30	30	15	90-130	200-300	35x5	M12	4.8
GDD100	100	100	50	45	30	15	90-130	200-300	40x5	M12	8.5
GDD125	125	125	60	60	40	20	110-150	250-300	50x6	M16	13.2
GDD150	150	150	75	75	40	20	110-150	250-300	60x8	M16	18.5
GDD200	200	150	100	80	50	25	130-180	300-400	80x10	M20	23.1
GDD200	200	200	100	100	50	25	130-180	300-400	80x10	M20	32.9
GDD250	250	200	125	100	60	30	140-200	350-450	90x12	M24	39.9
GDD250	250	250	125	125	60	30	140-200	350-450	90x12	M24	51.5
GDD300	300	300	150	150	60	30	140-200	350-450	110x12	M24	74.1
GDD350	350	350	175	175	75	35	140-200	350-450	130x15	M30	101
GDD380	380	380	190	190	75	35	140-200	350-450	140x15	M30	119
GDD400	400	300	175	150	75	35	140-200	350-450	130x15	M30	99
GDD400	400	400	200	200	75	35	140-200	350-450	150x15	M30	132
GDD500	500	500	250	250	90	45	160-230	400-500	180x20	M36	206

units: mm; kg/m

Strong Rope Sp. z o.o.
Słoneczna Str. 36-1
PL 72-100 Białuń
NIP: 856-19-39-204
VAT: PL8561939204

Email : strongrope24@gmail.com
www.strong-rope.pl
Tel. +48 696902709 (Piotr) / Tel.+49 1624250537 (Karol)



GDC RUBBER FENDERS											
Fender size	A	B	ØC	ØD	E	F	G	H	Flat bar	Bolt size	Weight
GDC100	100	100	30	15	25	10	90-130	200-300	50x6	M12	10.1
GDC150	150	150	65	20	30	12	110-150	250-350	60x8	M16	20.6
GDC200	200	200	75	25	45	15	130-180	300-400	80x10	M20	38.5
GDC250	250	250	100	30	50	20	140-200	350-450	100x10	M24	59
GDC300	300	300	125	30	60	25	140-200	350-450	110x12	M24	83.7
GDC350	350	350	150	35	70	25	140-200	350-450	120x12	M30	113
GDC400	400	400	175	35	80	30	140-200	350-450	130x15	M30	146
GDC400	400	400	200	35	80	30	140-200	350-450	130x15	M30	137
GDC500	500	500	250	35	100	30	140-200	350-450	130x15	M36	214

units: mm; kg/m



Strong Rope Sp. z o.o.
Słoneczna Str. 36-1
PL 72-100 Białuń
NIP: 856-19-39-204
VAT: PL8561939204

Email : strongrope24@gmail.com
www.strong-rope.pl
Tel. +48 696902709 (Piotr) / Tel.+49 1624250537 (Karol)